

Air-Light® Tower SLT-400K

The Ultimate Area Light!

Light Head Specifications:

- Dual LED Lights – output total 403,200 lumen
- 201,600 lumens (1500 watt) per lamp head
- Voltage options available: 120 VAC 1-phase, 60 hz, 30 Amp;
208, 240, 480 3-phase available
- 120 degree beam angle per head
- 50,000 working hour rating
- Meanwell Industrial Driver
- IP 66 rating
- Each light panel 24" H X 36" W X 3" D
- Independent lamp heads move up and down. Also moves left and right in 10 degree latching positions

Other Specifications:

- Powder coated frame available in several colors
- Photocell sensor to auto-shutoff unit during daytime
- Forklift guides on all 4 sides
- 4 swivel lashing D-rings for lifting
- Four collapsible 5 foot steel stabilizer legs with leveling jacks
- Base dimension with legs extended 10'6" square
- Telescoping steel mast – 9' 4" high. Adjustable to 30' height
- Steel cable winch with hand crank and brake unit or electric
120 - 208 winch
- 360 degree rotating mast
- NEMA 3R rated electrical control box

Dimensions: Base Frame – 4' X 4', 3/8" Steel Frame

Total weight: 2,700 lbs.



**Raised
Position
30 Foot Tall!**

**Air-Light® patent
information:
www.airsystems.com**

**Custom Options Available!
Call Customer Service to discuss
the perfect light for your application.**

Front Facing Lights



Light Up the Workspace with 400K+ Lumens!




Legs Deployed with Caution Tape Poles



Light Tower Extended

Custom Options
Include Electrical
Ratings, Custom
Colors, & Trailer
Version.

Contact Customer
Service for Details

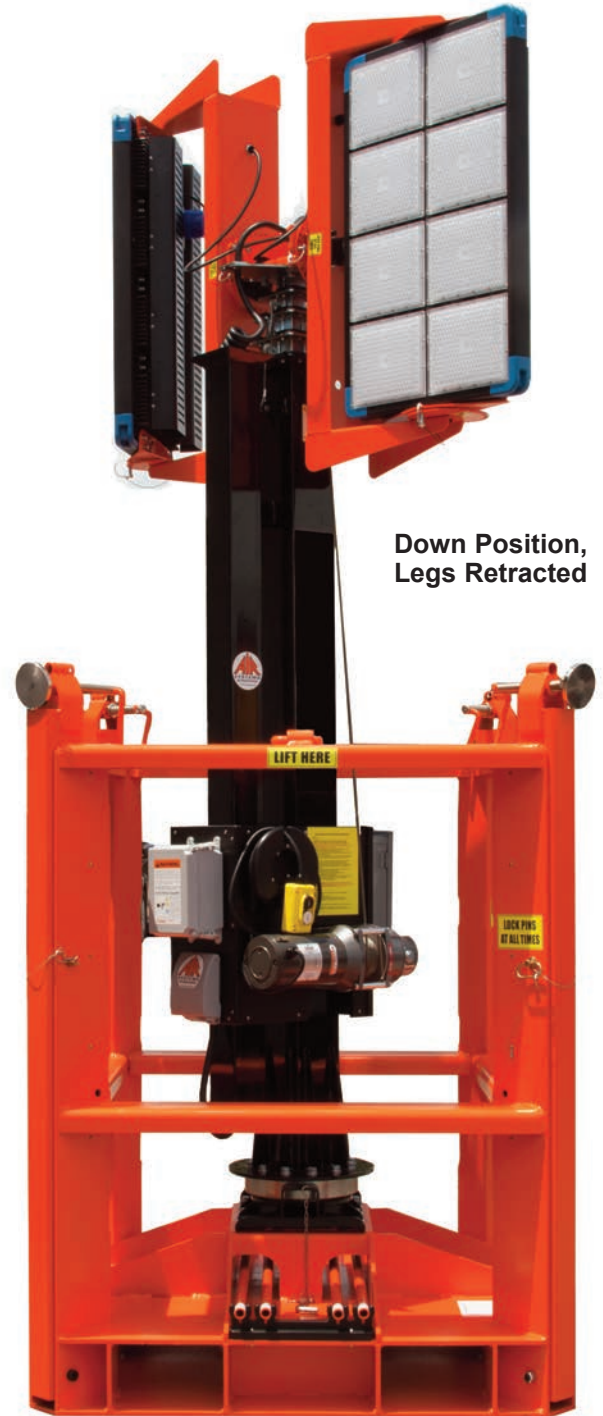

Down Position,
Legs Retracted



Air Systems International, Inc.

Sales@airsystems.com
Toll Free: (800) 866-8100
Phone: (757) 424-3967

www.airsystems.com