

Air-Light® & Air-Light® II

DC Powered Area Light Series



*Portable Area Lighting for
Industrial, Emergency, and
Highway Applications*



Leading The Safety Industry Since 1984
www.AirSystems.com

Air-Light®

- For use in ALL WEATHER CONDITIONS AND TERRAIN!
- IP54 rated for dust protected and water splashing
- Internal battery can be charged from external 12 VDC or 110-240 VAC power sources and the Air-Light® can operate while charging
- Power port socket for charging the internal battery or powering cell phones, laptops, or other device utilizing 12 VDC power
- Operate/charge with clamp style jumper cables
- Air-Light® delivered fully assembled in a roller case with handle
- Air-Light® deploys/stows rapidly without the use of tools and folds to fit within the integral case
- Stainless steel legs extend up to 33"
- Operational in sustained 35 mph full frontal winds, 65+ mph rear winds
- Aluminum mast extends from a range of 30" - 87" above ground
- Dimensions closed: 14" W X 10" D X 21.5" H
- Weight: 44 lbs.



LIFETIME WARRANTY ON LIGHT HEADS

Air-Light® patent information:
www.AirSystems.com

Air-Light® Applications

- Area Lighting
- Construction & Maintenance
- Utility Work
- Emergency Response Lighting
- Crime Scene Investigation
- Power Outages
- Hospital Triage

Fully Extends to 87" Tall



Folds Into Rolling Case

Light Head Run Times On Back Page



AL4KBP
4000 Lumen



AL9800BP
9800 Lumen

Air-Light® II

Fully Extends
to 8' Tall



Light Head
Run Times
On Back Page



AL2-4K-35
4000 Lumen



- For use in ***ALL WEATHER CONDITIONS & TERRAIN!***
- IP54 rated for dust protected and water splashing
- Sets up in seconds - no tools required
- Up to an 8 foot light extension
- 12 VDC sealed 35 amp hour AGM lead acid battery
- 12 VDC power port for charging
- Vehicle Jumper Connection Posts
- Adjustable directional lampheads
- Digital push-to-test voltage meter
- 18" Stainless steel collapsible legs retract for storage
- Legs extend to provide stable tripod base
- Independent light on/off switches
- Amber LED flasher light on/off switch
- Cord storage in front & rear pockets
- Dimensions: 17" W X 8" D X 26" H
- Weight: 44 lbs.

Air-Light® II
patent information:
www.airsystems.com

Air-Light® II Applications

- Area Lighting
- Flagger Lighting
- Construction & Maintenance
- Utility Work
- Emergency Response Lighting
- Power Outages
- Hospital Triage



AL2-95-35
4000 Lumen



Light Heads Rise to 8 foot Height
to Illuminate Highway Flaggers

25 Feet / 7 Meters



Light Run Time (in Hours)



4000 Lumen
2 Light Heads



9500 Lumen
2 Light Heads



9800 Lumen
2 Light Heads

Air-Light®



22 Amp Battery


| Run Hours | | |
|-------------------|---------------------------|-------------------|
| 1 Head Operating | Configuration not offered | 1 Head Operating |
| 14+ | | 7+ |
| 2 Heads Operating | | 2 Heads Operating |
| 7+ | | 4+ |

Air-Light® II



35 Amp Battery

| Run Hours | | |
|-------------------|-------------------|-------------------|
| 1 Head Operating | 1 Head Operating | 1 Head Operating |
| 25+ | 9+ | 9+ |
| 2 Heads Operating | 2 Heads Operating | 2 Heads Operating |
| 14+ | 5+ | 5+ |

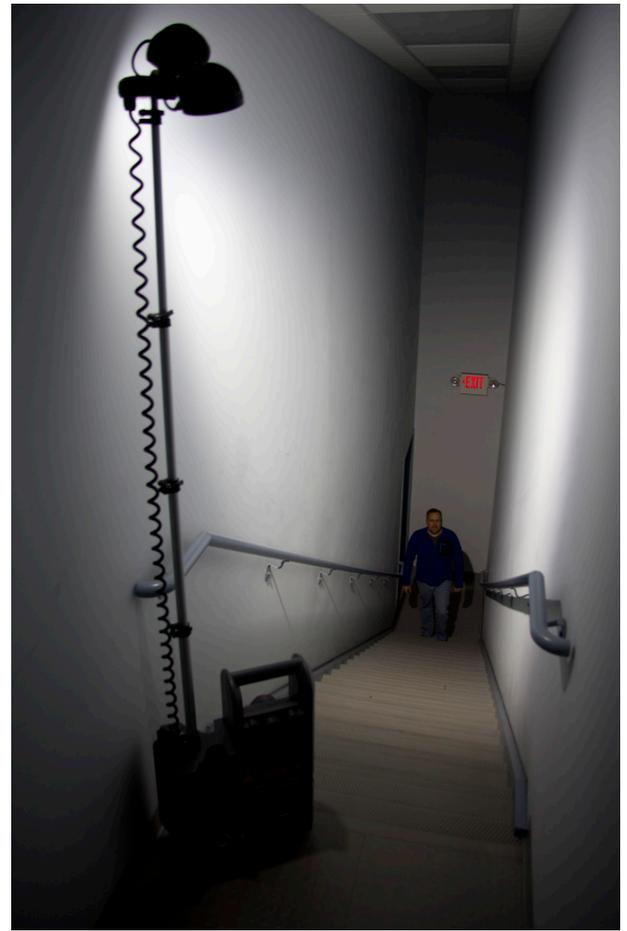

Light Head Specifications:

- IP-68 rated dustproof and waterproof
- Anodized aluminum frame with a polycarbonate lens
- Operating temperature: -40°F to 176°F (-40°C to 80°C)



4000 total lumens
2 Lights per Unit
2 amps, 24 watts



9500 total lumens
2 Lights per Unit
7.5 amps, 90 watts



9800 total lumens
2 Lights per Unit
6.65 amps, 80 watts



All LED Lights Have a 60° Flood Beam Pattern

The Air-Light®

| Model No. | Description |
|-----------|---|
| AL4KBP | Air-Light®, LED lights, 4000 total lumens |
| AL9800BP | Air-Light®, LED lights, 9800 total lumens |

All Air-Light® models include 22 amp battery, internal 3 amp battery charger, and charging cables

The Air-Light® II

| Model No. | Description |
|-----------|--|
| AL2-4K-35 | Air-Light® II, LED lights, 4000 total lumens |
| AL2-95-35 | Air-Light® II, LED lights, 9500 total lumens |
| AL2-98-35 | Air-Light® II, LED lights, 9800 total lumens |

All Air-Light® II models include 35 amp battery, internal 3 amp battery charger, and charging cables



WARNING: This product contains a sealed lead acid battery which can expose you to chemicals including **Lead** and **Sulfuric Acid**, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Air Systems International, Inc.

Email: sales@airsystems.com

Catalog Request: catalog@airsystems.com

www.AirSystems.com

Toll Free USA and Canada:

1 (800) 866-8100

Phone: 1 (757) 424-3967

Copyright© 2015-2024 Air Systems International, Inc.