

Operational Features:

- **Weatherproof - can be used in dusty & wet environments!**
- Collapsible aluminum extension mast with cam lock adjustments and retractable cable
- Can be operated from internal battery or external 12 VDC power through DC power port or jumper cables without interrupting light operation
- Push-to-test digital volt meter on front panel
- 12V DC power port for quick charge from an external battery source and/or run 12V devices such as cell phones, laptops, and/or handheld lights
- Independent directionally adjustable light heads
- Charge with clamp style jumper cables or 110-240 VAC, 50/60 Hz power
- Jump start vehicle with clamp style jumper cables
- Retracting legs offer support on uneven terrain
- Mast range 24" to 96" (8') above ground

Internal Battery:

- 12 VDC sealed 35 amp hour AGM lead acid battery
- Built in 110-240 VAC, 50/60 Hz, 3 amp charge system (charger UL approved)
- Safely stored/operated at -40°F to 140°F (-40°C to 60°C)
- Recommended continuous charging when not in use
- 24 hour recharge when fully depleted
- Rated for 500+ charge cycles
- One year replacement warranty on battery and charger

Light Head Specifications:

- **IP-68 rated dustproof and waterproof**
- 60° beam pattern
- Anodized aluminum frame with a polycarbonate lens
- Operating temperature: -40°F to 176°F (-40°C to 80°C)
- Lifetime warranty on light heads



Air Light-II™ Dual Cube



Dual Cube:

- 1800 lumens
- 1.5 amps
- 20 watt

• Full Charge Run Time: 16+ Hours



Quad Cube:

- 3600 lumens
- 3 amps
- 40 watt

• Full Charge Run Time: 8+ hours



XP:

- 7000 lumens
- 5.8 amps
- 70 watts

• Full Charge Run Time: 5+ hours

Air Light-II™ Area Lighting System

Model No.	Description
	Air-Light - II™ - LED
AL2-2-35	Air Light-II™ - Dual Cube, 35 Amp, 1800 Lumens
AL2-4-35	Air Light-II™ - Quad Cube, 35 Amp, 3600 Lumens
AL2-7-35	Air Light-II™ - XP, 35 Amp, 7000 Lumens
	Magnetic Hand-held Single Cube LED Light
ALHL25	LED Hand Light, 25 foot cord with male power port adapter

All Air Light-II™ models include internal battery pack, 3 amp battery charger, and cables.

Dimensions:

- Width:** 17.5"
- Depth:** 8"
- Height:** 25"
- Height with mast fully extended:** 8' (96")
- Leg extension:** 16" providing 32" diameter base
- Weight:** 41 lbs. (XP: 45 lbs.)

E-Mail: Sales@airsystems.com
Web: www.airsystems.com
Toll Free: (800) 866-8100
Phone: (757) 424-3967

All Weather Portable Area Lighting



Designed For Use In Any Weather!

Patented Area Lighting for Commercial and Industrial Applications



The Air Light - II™

DC Powered Portable LED Light Series

Fully Extends to 8' Tall!



- For use in ALL WEATHER CONDITIONS!
- Light heads IP-68 rated dustproof and waterproof
- Sets up in seconds - no tools required
- Up to an 8 foot light extension
- 24" storage height with mast down
- 12 VDC sealed 35 amp hour AGM lead acid battery
- Legs extend to provide stable tripod base
- Lifetime warranty on LED Lamps
- Yellow LED flasher on rear for added safety
- DC Power Port for charging


XP Control Panel View
7000 Total lumens
Model No. AL2-7-35



Proudly Manufactured in the USA
by Air Systems International, Inc.

AIR LIGHT - II™

Features

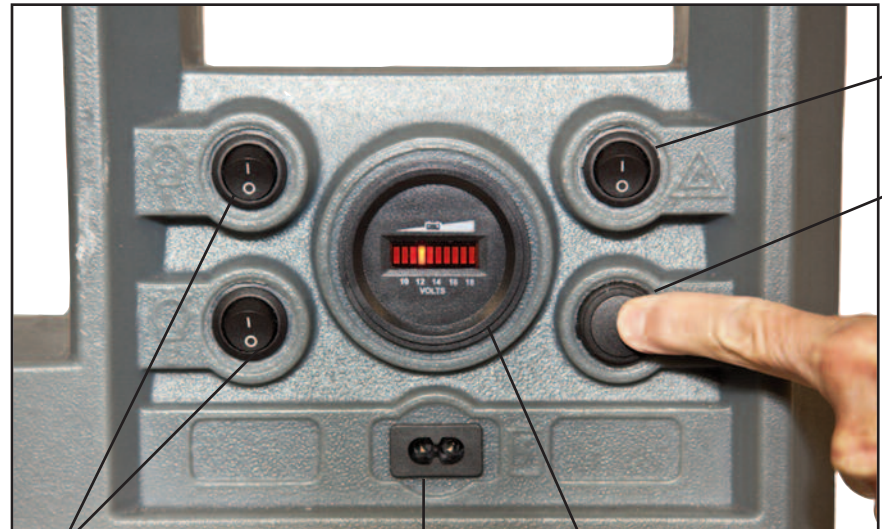

Independent Light On/Off Switches 110 - 240 VAC Charge Jack Voltage Meter

- Control Panel**
- NEMA 3 protection
 - Independent light control switches
 - Digital push-to-test voltage meter
 - Dual ended power port cable for connection to vehicle or auxiliary power port
 - 110 VAC US cord standard
 - International cord sets available

- Power Sources**
- DC to DC and 115 VAC charging cords provided. 12 volt DC power port can operate or charge accessories such as cell phones or laptops



Dual Cube Control Panel View
Model No. AL2-2-35

US and Foreign Patents Pending



- LED Flasher Light
- Color coded POS (+) and NEG (-) connection posts
- DC Power Port
- NEMA 3 Protection
- Charging Cord Storage in Front and Rear Pockets
- Polyethylene Collapsible Legs Provide 32" Support base or legs retract for storage

Dual Cube Back Panel View
1800 lumens
Model No. AL2-2-35

